



INVEST IN THE FUTURE



Made in France
since 1964



PLASMA cutting and gouging systems

Plasma cutting is one of the most widely used processes in metallurgy and manufacturing. Its cutting speed and precision often give it the edge over flame cutting.



PLASMA TECHNOLOGY

Plasma cutting is a localised, fusion-cutting process in which the compressed jet of air pushes the metal to a melting temperature. GYS systems are portable and easy to use, with even higher cutting speeds than flame cutting. Due to its versatility, plasma technology offers the possibility of cutting a wide variety of conductive materials up to a thickness of 57 mm.

Main uses and applications:

- Cuts a variety of conductive materials including mild steel, carbon steel, stainless steel, aluminium, copper, brass and other ferrous materials.
- Straight / bevelled cut
- Automated cutting
- Highly accurate gouging
- Drilling
- Sheet metal marking

OXYCUTTING technology

The equipment is simple and the user can be up and running quickly. However, this process is rather slow and only suitable for cutting carbon steel. Oxy-gas is not effective on other types of metal such as stainless steel or aluminium. What's more, the workpiece must be preheated before cutting, which further reduces productivity. Safety concerns arise from the use of acetylene, which is highly flammable and unstable (this combustible gas is most commonly used with flame cutting).

Main uses and applications:

- Cutting steel for manufacturing or dismantling it.
- Heating parts for bending, straightening, heat treatment.
- Loosening jammed or rusted parts and bolts

PLASMA CUTTING		OXYCUTTING
Material(s)	Conductive metals (Steel, Aluminium, Copper, Brass)	Carbon steel only
Thickness	Up to 57 mm	Up to 50 cm
Cutting quality	Excellent cutting angularity. Small heat-affected area.	Good cutting angularity Large heat-affected area
Productivity	Fast cutting speed on all thicknesses.	Slow cutting speed. (The preheating time increases the cutting time).
Secondary operations	Minimal slag	Grinding and removal of surface oxidation almost always required.
Operating costs	€	€€€
Equipment cost	€€	€
Portability	Yes	Yes
Gouging	Yes, very accurate	Yes
Safety	★★★	★

FOUR CUTTING ADVANTAGES PLASMA



Cutting quality

Plasma cuts produce less slag (burrs).



Easy to use

No gas to adjust, no flame to control.



Productivity

Cuts more parts, faster and with fewer secondary operations.



Safety

No flammable gas required, uses only compressed air.

MECHANISED CNC CUTTING

The term «CNC» refers to «Computer Numerical Control». The torch's movement is controlled by a computer on the cutting table using a computer program.

Three advantages of automated cutting:

- Consistent and reliable performance
- Increased productivity
- Optimised cutting quality.

More information?

There's more information in the brochure.



MANUAL CUTTING



EASYCUT 25	CUTTER 25 K	CUTTER 35 KF	CUTTER 30 FV	EASYCUT 40
------------	-------------	--------------	--------------	------------

Max. output current	25 A	25 A	35 A	30 A	40 A
Mains voltage	230 V - 1 ph	230 V - 1 ph	230 V - 1 ph	110/230 V - 1 ph	230 V - 1 ph

Performance de coupe (mm)	Separation	Steel	8	8	15	15	20
	Recommended		6	6	10	10	15
	Drilling		-	-	-	-	-

Mechanised cutting		-	-	-	-	-
Internal compressor		-			-	-
Automatic air pressure control		-	-	-	-	-
Marking		-	-	-	-	-
Gouging		-	-	-	-	-

Protection rating	IP 21	IP 21	IP 21	IP 21	IP 21
Weight (kg)	7.8	17	30	11	8
Part no. with accessories*	065543	030947	031036	013858	029743

*Power source + earth clamp
+ hand-held torch

MANUAL OR MECHANISED CUTTING



CUTTER 45 CT	CUTTER 70 CT	NEOCUT 105	CUTTER 125A TRI	NEOCUT 125
--------------	--------------	------------	-----------------	------------

Max. output current	45 A	70 A	105 A	125 A	125 A
Mains voltage	110 V 1 ph	230 V 1 ph	400 V - 3 ph	400 V - 3 ph	400 V - 3 ph

Performance de coupe (mm)	Separation	Steel	15	30	35	40	57	57
	Recommended		10	25	25	35	40	40
	Drilling		5	12	15	20	25	25

Mechanised cutting						
Internal compressor		-	-	-	-	-
Automatic air pressure control		-	-			
Marking		-	-		-	
Gouging		-	-			

Protection rating	IP 23	IP 23	IP 23	IP 23	IP 23
Weight (kg)	15	22	33	42	36
Part no. with accessories*	062962	013841	063112	029910	067448

*Power source + earth clamp
+ hand-held torch

Glossary

Discover the technological features of our products as well as a brief explanation.

PFC	Power Factor Correction (PFC) PFC technology suppresses spikes and regulates the supply current. The electrical network is therefore better used, accepting supply voltages between 185 and 265 V and, therefore, favouring the use of extension cords or power supplies. Another important effect is that a power source equipped with this device consumes much less energy from the grid and allows it to be used on smaller circuit breakers (e.g. 16 A).
FV	Flexible Voltage This technology extends the supply voltage range of the PFC from 85 to 265 V (185 to 265 V for a standard PFC). They can therefore be used on 110 V or 230 V electrical networks.
P400	Protect 400 Power sources equipped with this technology are able to withstand occasional or permanent voltage variations on the electrical network up to 400 V (lightning, engine-driven sets, load shedding, etc.).
AD	Anti-Dust In this type of design, the ventilation corridor is isolated from the electronic parts, which greatly reduces contact with external dust.

	Mechanised cutting Can be connected to a CNC cutting table.
	Internal air compressor Eliminates the need for a nearby compressed air source.
	Auto AIR Automatic management of air pressure and flow for optimal cutting.
	Open sheet mode Ideal for cutting work on perforated sheets.
	Marking mode Ideal for surface marking and part identification.
	Gouging Removal of metal in an efficient, precise and clean manner.



CUTTER 25 K & 35 KF

Built-in air compressor



MADE IN FRANCE



Internal compressor



With a cutting capacity of up to 15 mm, the CUTTER 25 K and 35 KF are manual plasma cutting machines with a built-in compressor. In the absence of compressed air, they are the perfect tool for any construction site.

- The internal compressor eliminates the need for an external air compressor and filter.
- Non-contact arc ignition to avoid electromagnetic interference.
- Equipped with a 4 m torch with trigger safety device to prevent accidental or unintentional triggering.

CUTTER 30 FV

Designed for body shops



MADE IN FRANCE



The CUTTER 30 FV is a 30 A plasma cutter with a 10 mm steel cutting capacity (15 mm in separation). Its HF-free priming system extends the life of the consumables. Designed for maintenance work, such as car bodywork, it has a very robust mechanism and a simple interface with flow meter.

- Easy-to-use control panel with a single potentiometer for adjusting the cutting intensity.
- Non-contact arc ignition to avoid electromagnetic interference.
- Manual air pressure adjustment (2.5 < 9 bar) with front panel flow meter.
- Equipped with a 4 m detachable torch equipped with a safety device on the trigger to prevent accidental or unintentional triggering.

Specifications

		CUTTER 25 K	CUTTER 35 K
Power Supply		230 V	
		1 ph, 50/60 Hz	
Fuse		16 A	
Current range		5-25 A	10-35 A
Duty cycle EN 60974-1 (40°C)	@ 60%	12 A / 84.8 V	26 A / 90.4 V
	@ 100%	11 A / 84.4 V	20 A / 88 V
Compresseur (niveau sonore)		60 -70 db	
Dimensions L x l x h		22 x 45 x 31 cm	28 x 52 x 46 cm
Weight		17 kg	30 kg
Original torch		MT 25K (4 m)	

Performance

Recommended cut (Clean cut)	Steel	6 mm	10 mm
	Stainless steel / Alu	4 mm	8 mm
Maximum cut (Separation)	Steel	8 mm	15 mm
	Stainless steel / Alu	6 mm	10 mm

Options & Accessoires

MT 25K torch consumables kit	039971
MT 35K torch consumables kit	039964
Compass kit (Ø 10 > 134 cm)	040205

Ordering information

CUTTER 25 K + accessoires TOPARC MT 25K torch, 4 m + 2 m earth cable	030947
CUTTER 35 KF + accessoires TOPARC MT 35K torch, 4 m + 2 m earth cable	031036

Specifications

		CUTTER 30 FV	
Power Supply		230 V	110 V
		1 ph, 50/60 Hz	1 ph, 50/60 Hz
Fuse		16 A	32 A
Current range		10-30 A	
Duty cycle EN 60974-1 (40°C)	@ 60%	23 A / 89.2 V	19 A / 87.6 V
	@ 100%	20 A / 88 V	15 A / 86 V
Recommended air flow rate		115 L/min	
Recommended air pressure		2.5 > 9 bar	
Dimensions L x l x h		45 x 28 x 20 cm	
Weight		11 kg	
Original torch		TPT 40 (4 m)	

Performance

Recommended cut (Clean cut)	Steel	10 mm
	Stainless steel / Alu	8 mm
Maximum cut (Separation)	Steel	15 mm
	Stainless steel / Alu	10 mm

Options & Accessoires

TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
PLASMA 600 trolley	040298
Manual plasma torch TPT 40 - 4 m - with consumables	060753
Compass kit (Ø 10 > 134 cm)	040205

Ordering information

CUTTER 30 FV + accessoires TOPARC TPT 40 torch, 4 m + 2 m earth cable	013858
--	--------



EASYCUT 25 & 40

Ultra compact



The ultra-compact EASYCUT 25 and 40 plasma cutters are ideal for easily cutting all types of metal up to 20 mm thick. With a power rating of up to 40 A, they excel at low-current precision cutting. Ideal for the workshop, they offer true portability without sacrificing cutting performance.

- Compact and lightweight, they provide excellent mobility.
- Easy-to-use control panel with a single potentiometer for adjusting the cutting intensity.
- Non-contact arc ignition to avoid electromagnetic interference.
 - Manual air pressure adjustment (2.5 < 6.5 bar) with front bar graph.
- Equipped with a 4 m detachable torch with trigger safety device.

CUTTER 45 CT

Versatile



MADE IN FRANCE



The professional-quality, multi-purpose CUTTER 45 CT plasma cutter is characterised by its ability to cut metal up to 30 mm thick. The CNC interface and the automatic, AT-70, industrial torch allow for a fully mechanised operation.

- Three working modes: cutting, trigger-lock cutting and cutting of perforated sheets.
- Pre-wired for use on automatic cutting table (optional CNC-1 analogue kit).
- Non-contact arc ignition to avoid electromagnetic interference.
 - Manual air pressure adjustment (4.1 < 6.5 bar) with front bar graph.
- MT-70 premium torch designed to withstand impact and heat
 - (optional).

Specifications

	EASYCUT 25	EASYCUT 40
Power Supply	230 V 1 ph, 50/60 Hz	
Fuse	16 A	32 A
Current range	10-25 A	10-40 A
Duty cycle	@ 60%	15 A / 86 V
EN 60974-1 (40°C)	@ 100%	10 A / 84 V
Recommended air flow rate	115 L/min	
Recommended air pressure	2.5 > 6.5 bar	
Dimensions L x l x h	42 x 15 x 30 cm	
Weight	7.8 kg	8 kg
Original torch	TPT 40 (4 m)	

Performance

	EASYCUT 25	EASYCUT 40
Recommended cut (Clean cut)	Steel 6 mm	15 mm
	Stainless steel / Alu 4 mm	10 mm
Maximum cut (Separation)	Steel 8 mm	20 mm
	Stainless steel / Alu 6 mm	15 mm

Options & Accessoires

TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
PLASMA 600 trolley	040298
Manual plasma torch TPT 40 - 4 m - with consumables	060753
Compass kit (Ø 10 > 134 cm)	040205

Ordering information

EASYCUT 25 + accessoires	065543
TOPARC TPT 40 torch, 4 m + 2 m earth cable	
EASYCUT 40 + accessoires	013858
TOPARC TPT 40 torch, 4 m + 2 m earth cable	

Specifications

	CUTTER 45 CT	
Power Supply	230 V 1 ph, 50/60 Hz	110 V 1 ph, 50/60 Hz
Fuse	16 A	32 A
Current range	10-45 A	10-30 A
Duty cycle	@ 60%	41 A / 96.4 V
EN 60974-1 (40°C)	@ 100%	32 A / 92.8 V
Recommended air flow rate	115 L/min	185 L/min
Recommended air pressure	5 > 7 bar	
Dimensions L x l x h	48 x 37 x 23 cm	
Weight	15 kg	
Original torch	MT-70 (6 m) or TPT 40 (4 m)	

Performance

		230 V MT-70 torch	110 V
Recommended cut (Clean cut)	Steel	25 mm	10 mm
	Stainless steel / Alu	15 mm	8 mm
Maximum cut (Separation)	Steel	30 mm	15 mm
	Stainless steel / Alu	20 mm	10 mm
Drilling	Steel	12 mm	5 mm
	Stainless steel / Alu	6 mm	3 mm

Options & Accessoires

MT-70 torch consumables kit	061613
TPT 40 torch consumables kit	039957
Dehumidifier filter	039728
MT-70 manual plasma torch - 12 m - without consumables	037519
Automatic AT-70 plasma torch - 6 m - without consumables	037526
Automatic AT-70 plasma torch - 12 m - without consumables	037533
CNC-1 Analogue Kit for cutting table connection	039988
Cutting / chamfering / torch guidance kit	038653
TPT 40 Plasma Torch Compass Kit (Ø 10 > 134 cm)	040205
MT-70 Plasma Torch Compass Kit (Ø 40 > 82 cm)	037984

Ordering information

CUTTER 45 ct + 2 m earth cable	014787
CUTTER 45 CT pack + accessories	062962
TOPARC MT-70 torch, 6 m + consumables kit + 2 m earth cable	
CUTTER 45 CT + accessoires	013629
TOPARC TPT 40 torch, 4 m + 2 m earth cable	

CUTTER 70 CT

Portable for industry



MADE IN FRANCE



The professional-quality, three-phase plasma cutter, CUTTER 70 CT, is capable of cutting metal up to a thickness of 35 mm. The CNC interface and the automatic, AT-70, industrial torch allow for a fully mechanised operation.

- Easy-to-use control panel with a single potentiometer for adjusting the cutting intensity.
- Three working modes: Cutting, trigger-lock cutting and cutting of perforated sheets.
- Pre-wired for use on automatic cutting table (optional CNC-1 analogue kit).
- Non-contact arc ignition to avoid electromagnetic interference.
- Manual air pressure adjustment (4.1 < 6.5 bar) with front bar graph.
- MT-70 premium torch designed to withstand impact and heat (optional).



Performance

Recommended cut (Clean cut)	Steel	25 mm
	Stainless steel / Alu	18 mm
Maximum cut (Separation)	Steel	35 mm
	Stainless steel / Alu	25 mm
Drilling	Steel	15 mm
	Stainless steel / Alu	12 mm
Gouging	Withdrawal rate	4.8 kg/h

Specifications


Work mode		Cutting	Gouging
Power Supply		400 V 3 ph, 50/60 Hz	
Fuse		16 A	
Current range		20-70 A	
Duty cycle	@ 60%	70 A / 108 V	60 A / 124 V
EN 60974-1 (40°C)	@ 100%	55 A / 102 V	45 A / 118 V
Recommended air flow rate		270 L/min	
Recommended air pressure		5 > 7 bar	
Dimensions L x l x h		52 x 40 x 26 cm	
Weight		22 kg	
Original torch		MT-70 (6 m)	

Options & Accessoires


MT-70 torch consumables kit	061613
Dehumidifier filter	039728
Trolley	039568
MT-70 manual plasma torch - 12 m - without consumables	037519
Automatic AT-70 plasma torch - 6 m - without consumables	037526
Automatic AT-70 plasma torch - 12 m - without consumables	037533
CNC-1 Analogue Kit for cutting table connection	039988
Filter with stainless steel grid (630 µm filtration)	046580
Cutting / chamfering / torch guidance kit	038653
MT-70 Plasma Torch Compass Kit (Ø 40 > 82 cm)	037984

Ordering information

CUTTER 70 CT + 4 m earth cable	013636
CUTTER 70 CT + accessoires TOPARC MT-70 torch, 6 m + 4 m earth cable	013841

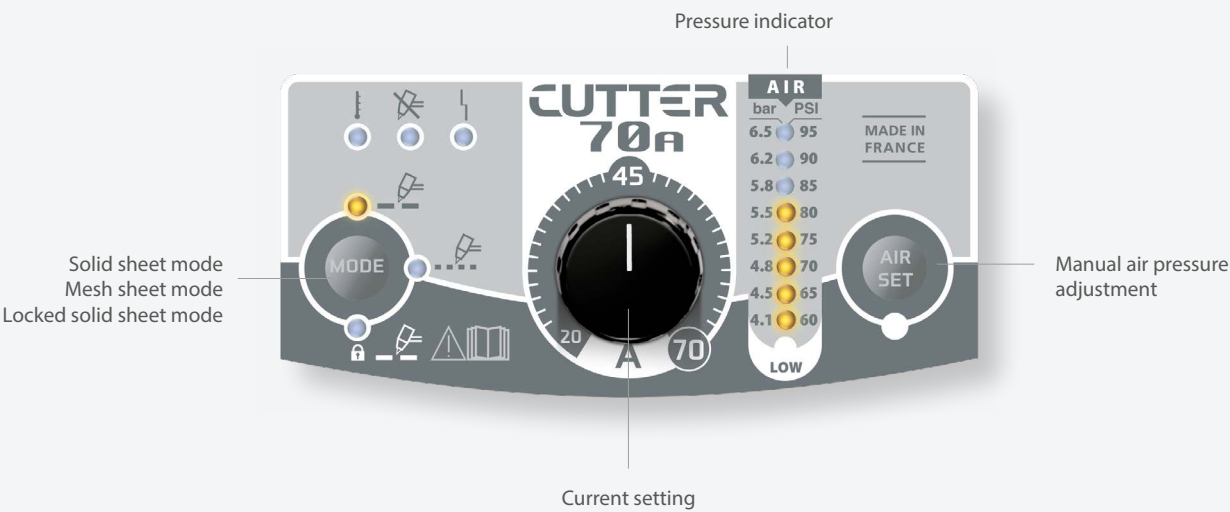

Recommended cut

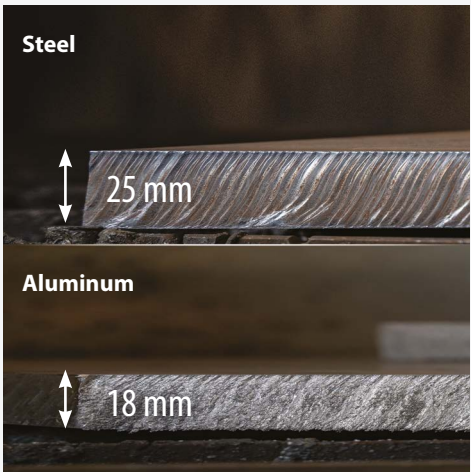

CUTTER 125A TRI
Maximum productivity



The CUTTER 125 TRI is a three-phase plasma cutter offering up to 125 A of power with a recommended cutting performance of 40 mm and a maximum cut of 57 mm. Equipped with automatic air pressure management, it offers optimal cutting quality throughout the life of the consumables.

- Automatic airflow and pressure management.
- Four working modes: cutting, trigger-lock cutting, cutting of perforated sheets and gouging.
- Gouging with maximum shrinkage (specific skid and nozzle in option).
- Pre-wired for use on automatic cutting table (optional CNC-1 analogue kit).
- Quick torch connection/disconnection.
- Wide range of consumables for all thicknesses.
- Non-contact arc ignition to avoid electromagnetic interference.
- Mobile with the skate cart (optional).
- Intuitive LCD/TFT display offering excellent readability.



Performance

Recommended cut (Clean cut)	Steel	40 mm
	Stainless steel / Alu	40 mm
Maximum cut (Separation)	Steel	57 mm
	Stainless steel / Alu	57 mm
Drilling	Steel	25 mm
	Stainless steel / Alu	25 mm
Gouging	Withdrawal rate	12 kg/h

Specifications


Specifications		CUTTER 125A TRI	
Work mode		Cutting	Gouging
Power Supply		400 V 3 ph, 50/60 Hz	
Fuse		50 A	
Current range		25-125 A	
Duty cycle	@ 60%	-	-
EN 60974-1 (40°C)	@ 100%	125 A / 130 V	125 A / 150 V
Recommended air flow rate		305 L/min	
Recommended air pressure		5 > 9 bar	
Dimensions L x l x h		31 x 71 x 49 cm	
Weight		42 kg	
Original torch		MT-125 (6 m)	

Options & Accessoires


Consumables kit 45 / 65 / 85 A MT-125 torch	039537	
Consumables kit 85 / 105 A MT-125 torch	064720	
Consumables kit 105 / 125 A MT-125 torch	039544	
Dehumidifier filter	039728	
Skate trolley + bracket	039575	
MT-125 manual plasma torch - without consumables	12 m - 039513	
Automatic AT-125 plasma torch - without consumables	6 m - 038479	12 m - 039520
	15 m - 069787	20 m - 069794
CNC-1 Analogue Kit for cutting table connection	039988	
Filter with stainless steel grid (630 µm filtration)	046580	
Cutting / chamfering / torch guidance kit	038653	
MT-125 plasma torch kit (Ø 40 > 82 cm)	037984	

Ordering information

CUTTER 125A TRI + 4 m earth cable	029897
CUTTER 125A TRI + accessoires TOPARC MT-125 torch, 6 m + 4 m earth cable	029910

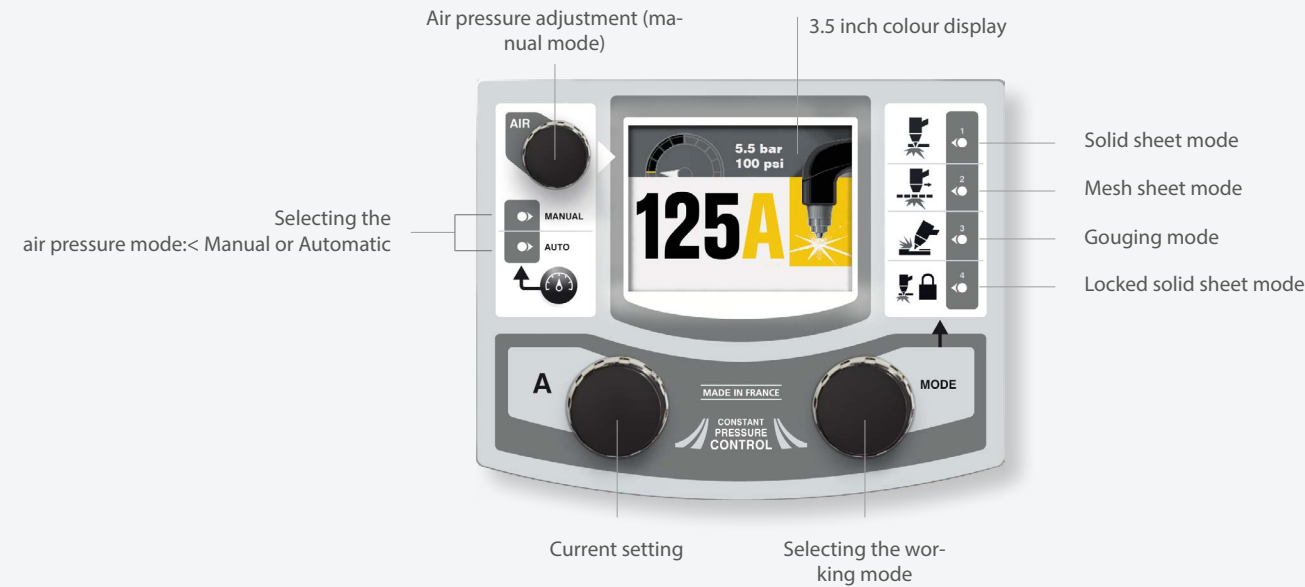

Recommended cut

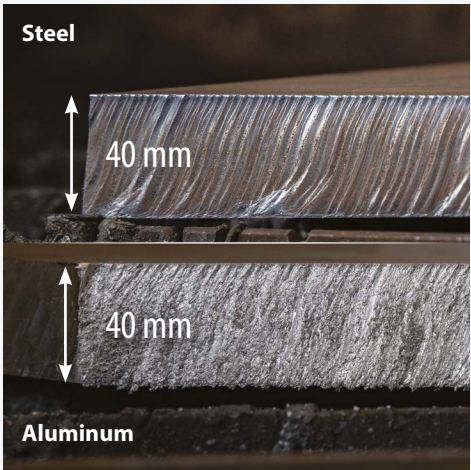

NEOCUT 105 & 125
State-of-the-art technology



With a high capacity for manual or mechanised cutting, NEOCUTs are the ideal solution in industrial environments. Its 100% duty cycle up to 125 A enables it to cut parts up to 57 mm thick. Equipped with automatic air pressure management, they offer optimal cutting quality throughout the life of the consumables.

- Automatic management of pressure and air flow according to the set current.
- Six working modes: cutting, trigger-lock cutting, gouging, trigger-lock gouging, cutting of perforated sheets and marking.
- Marking mode, ideal for tracing and identifying parts.
- Non-contact arc ignition to avoid electromagnetic interference.
- Pre-wired for use on automatic cutting table (optional analogue/digital CNC kit).
- Monitored wear and tear of consumables (nozzle and electrode).
- Easy software updates via USB cable with no tools or disassembly required.
- OLED display and multilingual interface: easy to use, with all settings at the touch of a button.



MADE IN FRANCE



Performance

		NEOCUT 105	NEOCUT 125
Recommended cut (Clean cut)	Steel	35 mm	40 mm
	Stainless steel / Alu	30 mm	40 mm
Maximum cut (Separation)	Steel	50 mm	57 mm
	Stainless steel / Alu	40 mm	57 mm
Drilling	Steel	20 mm	25 mm
	Stainless steel / Alu	18 mm	25 mm
Gouging	Withdrawal rate	8 kg/h	12 kg/h



Specifications

Specifications		NEOCUT 105		NEOCUT 125		
Work mode	Cutting		Gouging	Cutting		Gouging
Power Supply	400 V - 3 ph, 50/60 Hz					
Fuse	32 A			63 A		
Current range	20-105 A			20-125 A		
Duty cycle	@ 60%	-	105 A / 142 V	-	105 A / 142 V	
EN 60974-1 (40°C)	@ 100%	105 A / 122 V	90 A / 136 V	105 A / 122 V	90 A / 136 V	
Recommended air flow rate	305 L/min					
Recommended air pressure	5 > 9 bar					
Dimensions L x l x h	69 x 40 x 61 cm					
Weight	33 kg			36 kg		
Original torch	MT-125 (6 m)					

Options & Accessoires

Consumables kit 45 / 65 / 85 A MT-125 torch	039537	
Consumables kit 85 / 105 A MT-125 torch	064720	
Consumables kit 105 / 125 A MT-125 torch	039544	
Dehumidifier filter	039728	
Skate trolley + bracket	037717	
MT-125 manual plasma torch - without consumables	12 m - 039513	
Automatic AT-125 plasma torch without consumables	6 m - 038479	12 m - 039520
	15 m - 069787	20 m - 069794
Automatic AT-160 plasma torch without consumables	6 m - 067479	12 m - 067486
	15 m - 069800	20 m - 069817
CNC-1 Analogue Kit for cutting table connection	039988	
Digital CNC-2 kit for cutting table connections	064737	
CNC-3 Digital Retrofit Kit	068957	
Filter with stainless steel grid (630 µm filtration)	046580	
Cutting / chamfering / torch guidance kit	038653	

Recommended cut

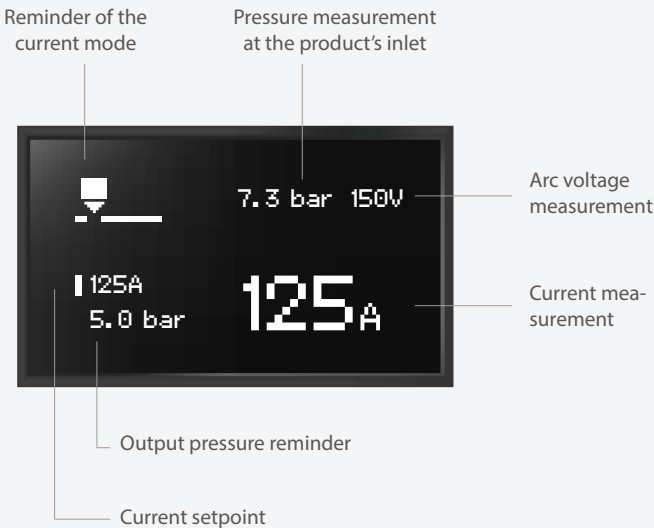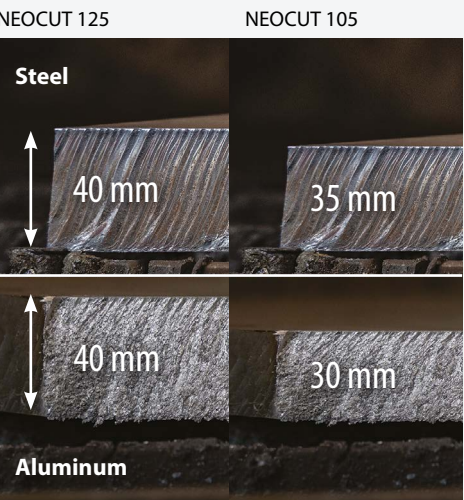

SINGLE-PHASE PACKS

	Earth cable	Manual torch	040208	Trolley 051331	Diffuser	Electrode	Hose	Nozzle

CUTTER 25 K

	029781	2 m, 10 mm ²	MT-25K, 4 m	■	x1	x3	x3	x1
Consumables kit 039971								

CUTTER 35 KF

	029804	2 m, 10 mm ²	MT-35K, 4 m	■	x1	x3	x3	x1
Consumables kit 039964								

8 mm 10 mm	Earth cable	Manual torch	Torch auto	CNC kit	Skate trolley	Diffuser	Electrode	Hose	Nozzle Ohmic	Deflector

CUTTER 45 CT

	1	062962	■	2 m, 10 mm²	MT-70, 6 m 037502				x1	x1	x1	x1	x1
	2	062979	■		MT-70, 12 m 037519				x1	x3	x3	x1	x1
	3	062986	■		AT-70, 12 m 037533	Analog 039988		x1 037557	x5 037564	x5 037571	x1 (Ohmic) 037618	x1 037649	
	Consumables kit 061613												

TRIPHASE PACKS

8 mm 10 mm	Earth cable	Manual torch	Torch auto	CNC kit	Skate trolley	Diffuser	Electrode	Hose	Nozzle Ohmic	Deflector

CUTTER 70 CT

	1	013841	■	4 m, 10 mm ²	MT-70, 6 m 037502				x1	x1	x1	x1	x1
	2	014589	■		MT-70, 6 m 037502				x1	x3	x3	x1	x1
	3	014596	■		MT-70, 12 m 037519				x1	x3	x3	x1	x1
	4	014619	■			AT-70, 12 m 037533	Analog 039988		x1 037557	x5 037564	x5 037588	x1 (Ohmic) 037618	x1 037649
Consumables kit 037540													
Consumables kit 037540													

CUTTER 125A TRI

	1	029910	■	4 m, 16 mm ² 036932	MT-125, 6 m 039506				x1	x1	x1	x1	x1
	2	029859	■		MT-125, 6 m 039506			039575	x1	x3	x6	x1	x1
	3	029866	■		MT-125, 12 m 039513			039575	x1	x3	x6	x1	x1
	4	029873	■			AT-125, 12 m 039520	Analog 039988		x1 039148	x5 039155	x5 039209	x1 (Ohmic) 039445	x1 039308
Consumables kit 039544													
Consumables kit 039544													

NEOCUT 105

	1	063112	■	4 m, 16 mm ² 036932	MT-125, 6 m 039506				x1	x1	x1	x1	x1
	2	065871	■		MT-125, 6 m 039506			037717	x2	x3	x6	x3	x3
	3	065888	■		MT-125, 12 m 039513			037717	x2	x3	x6	x3	x3
	4	065995	■			AT-125, 12 m 039520	Analog 039988		x1 039148	x5 039155	x5 039193	x1 (Ohmic) 039445	x1 039308
	5	068186	■			AT-125, 12 m 039520	Digital 064737		x1 039148	x5 039155	x5 039193	x1 (Ohmic) 039445	x1 039308
Consumables kit 064720													
Consumables kit 064720													

NEOCUT 125

	1	067448	■	4 m, 16 mm ² 036932	MT-125, 6 m 039506				x1	x1	x1	x1	x1
	2	068193	■		MT-125, 6 m 039506			037717	x1	x3	x6	x1	x1
	3	068209	■		MT-125, 12 m 039513			037717	x1	x3	x6	x1	x1
	4	068216	■			AT-125, 12 m 039520	Analog 039988		x1 039148	x5 039155	x5 039209	x1 (Ohmic) 039445	x1 039308
	5	068223	■			AT-125, 12 m 039520	Digital 064737		x1 039148	x5 039155	x5 039209	x1 (Ohmic) 039445	x1 039308
Consumables kit 039544													
Consumables kit 039544													

ACCESSORIES

	Dehumidifier filter 039728 Filter + cartridge 039735 Cartridge only
	Trolley 040208 CUTTER 25 K 051331 CUTTER 35 K 039575 CUTTER 85A / 125A 037717 NEOCUT 105 / 125
	Dust filter 046580 CUTTER 70 / 85A / 125A / NEOCUT 105/125
	CNC linkage kit 039988 CNC-1 Analogue 064737 CNC-2 Digital 068957 CNC-3 Digital Retrofitting

CUTTING GUIDES

	TPT compass kit 040205 Compatible with TPT 25K/35K - TPT40 - Z torches 040199 Guide carriage only
	MT compass kit 037984 Torch compatible with MT-70 / MT-125 037977 Guide carriage only
	Cutting kit / chamfering / guiding 038653 Torch compatible with MT-70 / MT-125

CONSUMABLES

Torch model				Diffuser x2		Electrode x10		Hose x10		Nozzle x4		Consumables kit																				
MT / TPT	Cutting	MT 25K	x1	040175	x3	040168	x3	040151	x1	040182	MT 25K	039971																				
		040229								MT35K	039964																					
		040236								MT 45K	039957																					
Torch model			Caliber		Diffuser x1		Electrode x5		Hose x5		Nozzle x1		Ohmic nozzle x1		Manual skate x1		Auto deflector x1		Consumables kit													
MT-70	Cutting	20-50 A	x1	037557	x3	037564	short	x3	x3	037571	short	x1	037601	-	x1	037625	-	-	20-50 A	061613												
		70 A	x1		x3	037564	short	x3	037588	short	x1				x1	037625			short	20-70 A	037540											
	Gouging	70 A		037557		037564		037595		037601		037632																				
MT-125	Cutting	Precision cut 45 A		039131		039155		039315		039216	-	-	-	-	-	-	-	-	-	45/65/85 A 039537												
		45 A	x1	039131	x3	x3	039162	x1	039216	x1											039230											
		65 A					x3															039179										
		85 A	x1	x3	039155	x3	039186	x1	039223	x1											039247	85/105 A 064720										
		105 A	x1				039148																x3	039193	x1							
		125 A	x1	x3	039209	x1																							105/125 A 039544			
	Gouging	65-85 A		039131	039155	039155	039261	039216	039223	039254	-	-	-	-	-	-	-	-	-	-												
		105 A	039148	039278																												
		125 A	039148	039285																												
	AT-70	Cutting	20-50 A	037557	037564	037571	037601	037618	-	037649																						
70 A			037588																													
AT-125	Cutting	Precision cut 45 A	039131	039155	039315	039216	039339	-	037496																							
		45 A																														
		65 A																														
		85 A																														
		105 A																														
		125 A	039148																		039193	039209	039223	039445	039308							
AT-160	Cutting	Precision cut 45 A	067509	037493	037516	-	067578	-	067592																							
		45 A																														
		65 A																														
		85 A																														
		105-125 A																														
		160 A																			067554	067561	067585	067608								

TORCHES

Reference	Series	Duty cycle		Length	Consumables	Reference number	Compatibility
		60%	100%				
	TPT 25	25 A	25 A	4 m	Includes	068087	CUTTER 25K
	TPT 40	40 A		4 m	Includes	060753	CUTTER 30 FV EASYCUT 40
	MT-70	70 A	50 A	6m	-	037502	CUTTER 45 CT CUTTER 70 CT
				12 m		037519	
	MT-125	125 A	105 A	6m		039506	CUTTER 85A TRI CUTTER 125A TRI NEOCUT 105 NEOCUT 125
				12 m		039513	
	AT-70	70 A	50 A	6m	-	037526	CUTTER 45 CT CUTTER 70 CT
				12 m		037533	
	AT-125	125 A	105 A	6m		038479	CUTTER 85A TRI CUTTER 125A TRI NEOCUT 105 NEOCUT 125
				12 m		039520	
				15 m		069787	
				20 m		069794	
				20 m		067479	
	AT-160	160 A	125 A	6m		067486	NEOCUT 125
				12 m		067486	
				15 m		069800	
				20 m		069817	

INVEST IN THE
FUTURE

www.gys.fr



GYS 2021 catalogue
Welding & Cutting

GYS FRANCE

1, rue de la Croix des Landes
53941 SAINT-BERTHEVIN - France
Tél. : 02 43 01 23 60

www.gys.fr | service.client@gys.fr



Made in France
since 1964